


SMART H.265+ 32 CH NVR

**H.265+
Support 4K**

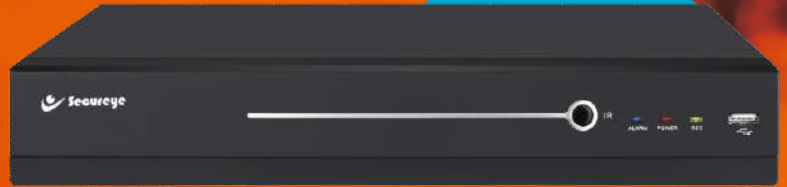

SPECIFICATION

S-NVR-2

Video & Audio Input	IP Video Input	32ch
	Audio Input	1 ch
Video & Audio Output	HDMI	1 ch, resolution: 4K(3840x2160)/30Hz 1920x1080/60Hz 1440x900/60Hz, 1280x1024/60Hz 1280x720/60Hz 1024x768/60Hz
	VGA	1ch, resolution: 1920x1080/60Hz, 1440x900/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
	Audio Output	1-Ch
Recording	Compression	H.265+/H.265 /H.264+/H.264
	Resolution	12M P/8M P/5M P/4M P/3MP/ 1080P/720P/D1/CIF/QCIF
	Bit Rate	64Kbps-10Mbps
Playback & Backup	Play Back Mode	64Kbps-10Mbps
	Decoding Capacity	1 6CH@1080P
	Synchronous Playback	16CH
	Backup Mode	USB Device/Network
Advanced Features	Smart Detection	Area Intrusion, Line crossing, Region Entrance /Region Exiting, Fast Moving, Object Missing, Unattended Object, Loitering Detection, Parking Detection, Face Detection, People Gathering Detection, Blurred detection, Scene change detection, Audio exception detection
	Smart Playback	Line Crossing/Area Intrusion / Motion Detection / Face Detection
	Cloud Storage	Support
	Cloud Upgrade	Support
Network	Incoming Bandwidth	256Mbps
	Outgoing Bandwidth	256Mbps
	Ethernet	1 RJ-45 10/100 / 1000 Mbps self-adaptive Ethernet interface HTTP, HTTPS, TCP/IP, IPv4, UPNP, RTSP, UDP, SMTP, NTP, DHCP,
	Network Function	IP Filter DDNS FTP P2P ONVIF 2.6
	Smart Phone	IOS(iPhone, iPad), Android(Phone, Pad)
Hard Disk	SATA	2 SATA interface
	Capacity	Up to 12 TB capacity for each HDD
External Interface	USB Interface	Front Panel : 1 x USB 2.0 Rear Panel 1 x USB 3.0
	Alarm In	8CH
	Alarm Out	1CH
General	Power Supply	DC12V 3.3A
	Power Consumption	≤15W (without HDD)
	Working Environment	0°C to +55°C / 10%-90%RH
	Dimension (WxDxH)	326*243*52mm
	Weight	≤2.3Kg

