


# 32 CHANNEL H.265+ NVR

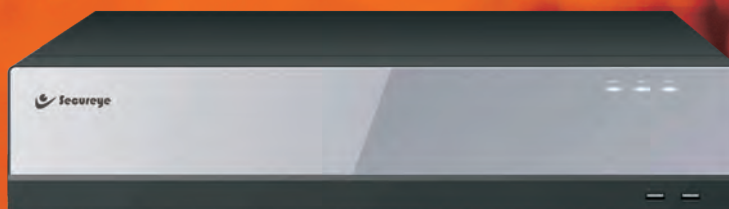

SPECIFICATION		S-32NV-4HDS-265	S-32NV-4HDG-265
	Chipset	Hi3536	
Video & Audio Input	IP Video Input	32ch	
	Two Way Talk	1-ch, RCA	
Video & Audio Output	HDMI	2ch, Resolution:4K(3840×2160)/30Hz,1920×1080/60Hz,1440×900/60Hz, 1280×1024/60Hz, 1280×720/60Hz,1024×768/60Hz1CH HDMI only 1080P, the other one is up to 4K	
	VGA	1ch, Resolution: 1920×1080/60Hz, 1440×900/60Hz, 1280×1024/60Hz, 1280×720/60Hz,1024×768/60Hz	
	Audio Output	2-ch, RCA	
Recording	Compression	H.265+/H.265/H.264+/H.264	
	Resolution	8MP/5MP/4MP/3MP/1080P/720P/D1/CIF /QCIF	
Playback & Backup	Playback Resolution	8MP/5MP/4MP/3MP/1080P/720P/D1/CIF /QCIF	
	Decoding Capability	16ch@1080P	
	Playback Mode	Smart Playback/Normal/Time Division/ Label/ Event/ Picture Playback	
	Backup Mode	USB Device/Network/eSATA	
Advanced Features	Smart Detection	Line crossing, Area Intrusion, Region Entrance, Region Exiting, Fast moving, Unattached Object, Object Missing, Face Detection	
	Smart Playback	Face detection/Line Crossing/Are Intrution/Motion Detection	
	Cloud Storage	Support	
	Cloud Upgrade	Support	
Network	Income Bandwidth	256Mbps	
	Output Bandwidth	256Mbps	
	Ethernet	2 x RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface	
	Network Function	HTTPs, HTTP, TCP/IP, IPv4, UPnP, RTSP,UDP, SMTP, SNMP, Multicast, NTP, DHCP, DNS, IP Filter, DDNS, FTP, P2P, ONVIF	
	Smart Phone	IOS(iPhone, iPad), Android(Phone, Pad)	
Hard Disk	SATA	2 SATA interface	4 SATA interface
	Capacity	Up to 8TB capacity for each HDD	
External Interface	USB Interface	Front panel: 2 × USB 2.0 / Rear panel: 1 × USB 3.0	
	eSata	1 x eSATA	
	RS 485	2	
	Alarm In	16-ch	
	Alarm Out	4ch	
General	Power Supply	AC 100~240V 30W	
	Power Consumption	≤30W(without HDD)	
	Working Environment	0°C~+55°C / 10%~90%RH	
	Dimension (W×D×H)	440×452×90mm	
	Weight	7.8kg	


[www.secureeye.com](http://www.secureeye.com)