


# STANDALONE Single Door Controller

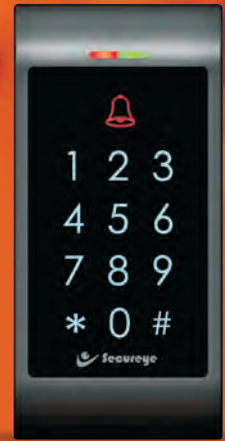

## KEY FEATURES

- ▶ **User Capacity: 450 Card & Password**
- ▶ **Built-in Buzzer**
- ▶ **Weigand output: WG26**
- ▶ **Read Card Distance: 2 ~ 8CM**
- ▶ **External Door Bell**

SPECIFICATION	S-B1CB	S-AC70-IC
Operation Mode	Proximity Card or PIN	Mifare/Smart Card or PIN
User Capacity	450 Card & Password	
Excitation frequency	125KHz	13.56MHz
Identification Time	≤0.3S	
Read Card Distance	2 ~ 8CM	
Wiegand output	WG26	
Built-in buzzer	YES	
External door bell	YES	
Operation humidity	20-80%	
Operation temperature	-10°C-60°C	
Power Adapter	DC 12V	

