




97.5F



S-B6CB

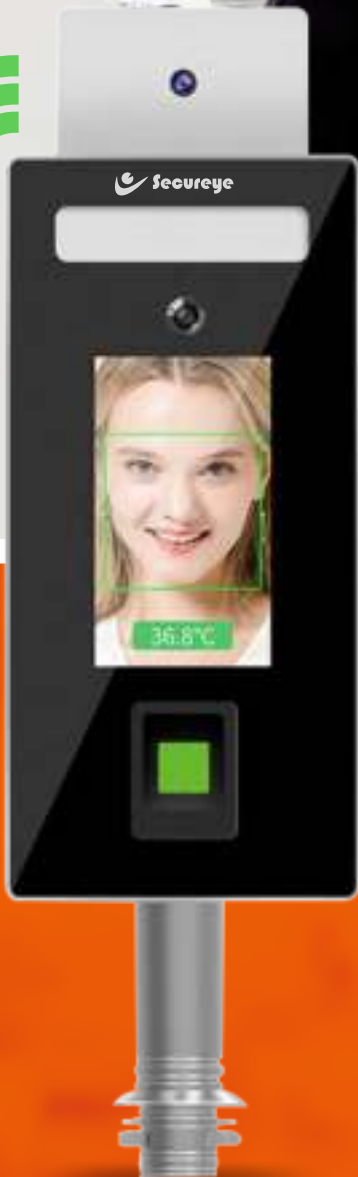

6 IN 1 Dynamic Thermal Face Recognition



Face



Biometric



RFID Card



Thermal



Mask



Access Control



S-B6CB-5K



S-B6CB-10K



S-B6CB-20K

5 Inch Capacitive Touch Screen, Single Touch Operation

Japanese Imported Temperature Measurement Module

Hisilicon CPU for fast processing speed

Face Recognition Technology Based on Deep Learning Algorithm

Wide Dynamic Function, Can Recognize Human Face Under Strong Light



Masked Face Accepted



Body Temperature Detected






Specification	S-B6CB-5K / S-B6CB-10K / S-B6CB-20K
Camera	1920 * 1080 Pixels
LED	White supplementary (9 LED)
	Brightness of lamp: 0~180ml, Light control: automatically adjust the brightness according to the ambient brightness
Fingerprint Identification	Optical Fingerprint
Mifare Card	Support: ISO/IEC 14443 A/MIFARE, Reading distance:≤ 3cm
Display	5" TFT LCD
Touch Panel	Support
Communication Mode	TCP/IP & WIFI
Wiegand Input / Output	Wiegand(26/34)
Access Control Function	Advance Feature Supported
Working Voltage	DC12V~13V (Under 2.0A)
Face Registration Capacity	5000 / 10000 / 20000
Fingerprint Registration Capacity	5000
Card Registration Capacity	5000
Log Capacity	500000
Management Record Capacity	10000
Time Management	Support 50 Time Slots
Alarm Function	Supported
Verification Mode	Face, Fingerprint, Card and & Combination
Algorithm Version	GreenFace v3.30
Facial Recognition Technology	Visual optical face recognition based on deep learning algorithm
Matching Speed	≤ 1.0s
Identification Distance	Daytime:≤3M, Night:≤ 1.8m (9 LED are used when there is no light source)
Face Recognition Angle	Left and right: ≤20°, Up and down: ≤15°
FAR/FRR	0.00001/ 0.1(%)
Temperature Measuring Distance	30-80cm
Temperature Measuring Time	Standing in the temperature zone 2s
Temperature Measurement Range	23-42°C
Temperature Alarm	YES
Environmental Requirements For Temperature Measurement	Avoid wind Avoid sweating Indoor temperature (15°C ~ 35°C) Avoid distant light Avoid light sources and glass
Operating Humidity	20% ~ 80%



Multiple Application



Lock Connection

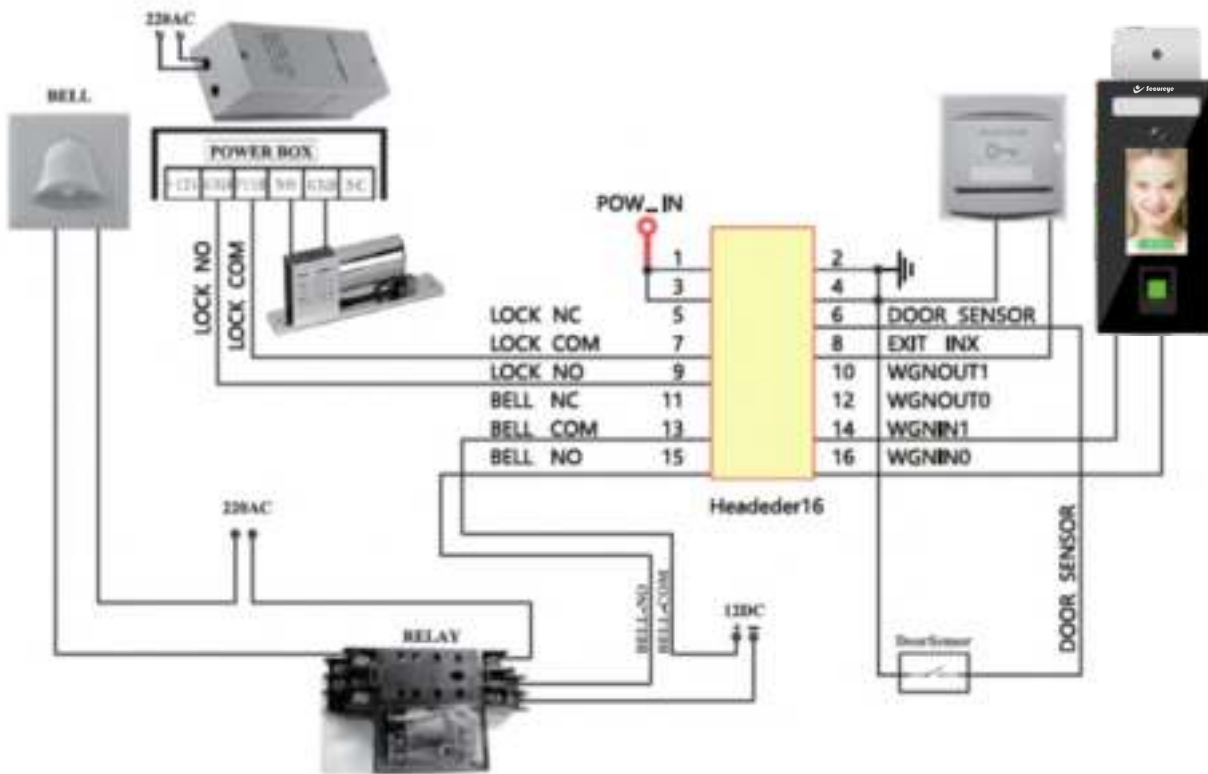

Biometric Stand

