



Varifocal/Motorized Dome IR Camera





Key Features

- 1/2.9" Progressive scan CMOS
- WDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- On-board storage, up to 128GB
- 2.8-12mm Varifocal lens
- Smart Focus: Motorized Zoom Lens(-Z)
- 30pcs SMD LED
- Support Tripple stream
- Support Region of Interest(ROI)
- Support Defog
- Support NAS
- Support UPnP-TM
- Smart Functions
- Smart IR

Supported Browser



Dimension (mm)

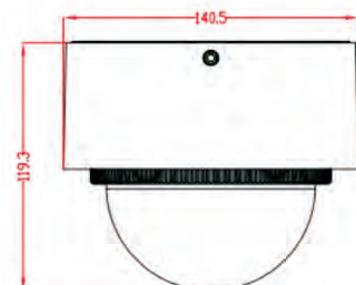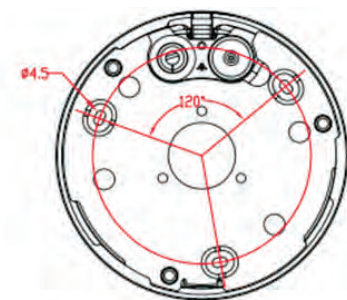

IP Video Surveillance Solution

Specification

S-DIRV-2M | S-DIRM-2M | S-DIRV-4M | S-DIRM-4M | S-DIRV-5M | S-DIRM-5M

Camera	Image Sensor	1/2.9" progressive Scan CMOS		
	Min. Illumination	Color:0.01 LUX ;0 LUX with IR on		
	Electronic Shutter Speed	Auto/Manual, 1/3~1/10000s		
	Day/Night	IR cut filter with auto switch (auto),color,B/W		
	Lens	2.8-12mm @ F1.4, Angle of view: 103°~30.8°		
	Max. IR LEDs Length	30m		
Compression Standard	Video Compression	H.264		
	H.264 Codec profile	Main profile		
	Video Bit Rate	32 Kbps~8 Mbps		
	Audio Compression	G.711A		
Image	Max.resolution	1920*1080	2592*1520	2560*1920
	Frame Rate Main Stream	25fps (1920*1080)	25fps (2592*1520)	25fps (2560*1920)
	Frame Rate Sub Stream	D1/CIF(1 ~ 30fps)		
	BLC	On/Off		
	ROI	Support		
	Defog	Support		
Network	Network Storage	NAS		
	Alarm Trigger	Motion detection, Intrusion detection, Line crossing, Network Disconnect, IP address conflict, Storage exception		
	Protocols	TCP/IP,ICMP,HTTP,FTP,DHCP,DNS,DDNS,RTP, RTSP,RTCP,NTP,UPnP,SMTP,UPnP-TM,P2P		
	System compatibility	Onvif 2.4,Profile S, CGI,Mobile Surveillance		
	Smart Phone	iPhone, Android		
Interface	Communication interface	1 RJ45 10M / 100M ethernet port		
	On-board storage	Support Micro SD/SDHC/SDXC slot, upto 128GB		
	Audio I/O	1/1(Internal Mic)		
	Alarm I/O	1/1		
	Reset button	Support		
General	POE	Support IP66 built in POE		
	Power Supply	DC12V, PoE (802.3af)		
	Power Consumption	Max. 5W		
	Weather Proof & Protection Level	IP66 & IK10		
	Operating Conditions	-30 °C ~ 60 °C, Humidity 95% or less (non-condensing)		

