


64 CHANNEL H.265+ NVR



SPECIFICATION		S-NVR-10
	Chipset	Hi3536
	IP Video Input	64ch
	Two Way Talk	1-ch, RCA
Video & Audio Output	HDMI	1ch, Resolution: 4K(3840×2160) / 30Hz, 1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz
	VGA	1ch, Resolution: 1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz
	Audio Output	2-ch, RCA
Record- ing	Compression	H.265+/H.265/H.264+/H.264
	Resolution	12MP/8MP/5MP/4MP/3MP/1080P/720P/D1/CIF /QCIF
Playback & Backup	Playback Resolution	12MP/8MP/5MP/4MP/3MP/1080P/720P/D1/CIF /QCIF
	Decoding Capability	16ch@1080P
	Synchronous Playback	16ch
	Playback Mode	Smart Playback/Normal/Time Division/ Label/ Event/ Picture Playback
	Backup Mode	USB Device/Network/eSATA
Advance Features	Smart Detection	Area Intrusion, Line crossing, Region Entrance /Region Exiting, Fast Moving, Object Missing, Unattended Object, Loitering Detection, Parking Detection, Face Detection, People Gathering Detection, Blurred detection, Scene change detection, Audio exception detection, Human Detection, Vehicle Detection
	Smart Playback	Face detection/Line Crossing/Are Intrution/Motion Detection/Human Detection/Vehicle Detection
	Cloud Storage	Support
	Cloud Upgrade	Support
Network	Income Bandwidth	320Mbps
	Output Bandwidth	256Mbps
	Ethernet	2 x RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface
	Network Function	HTTPs, HTTP, TCP/IP, IPv4, UPnP, RTSP, UDP, SMTP, SNMP, Multicast, NTP, DHCP, DNS, IP Filter, DDNS, FTP, P2P, ONVIF
	Smart Phone	IOS(iPhone, iPad), Android(Phone, Pad)
HDD	SATA	8 SATA interface
	Capacity	Up to 8TB capacity for each HDD
External Interface	USB Interface	Front panel: 2 × USB 2.0 , Rear panel: 1 × USB 3.0
	eSata	1 x eSATA
	RS 485	2
	Alarm In	16-ch
	Alarm Out	4ch
General	Power Supply	AC 100~240V
	Power Consumption	≤20W(without HDD)
	Working Environment	-10°C~+55°C / 10%~90%RH

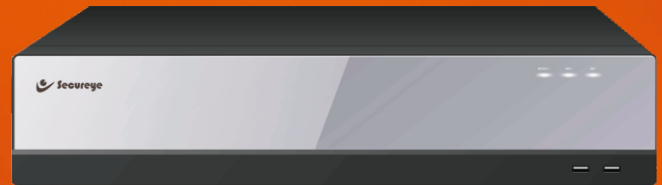