




2, 4 & 5MP H.264 Bullet IR Camera Varifocal/Motorized



Key Features

- 1/2.9" Progressive scan CMOS
- WDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- On-board storage, up to 128GB
- 2.8-12mm Varifocal / Motorized Lens
- Smart Focus: Motorized Zoom Lens(-Z)
- 6pcs Array LED
- Support Tripple stream
- Support Region of Interest(ROI)
- Support Defog
- Support NAS
- Support UPnP-TM
- Smart Functions

Dimension (mm)

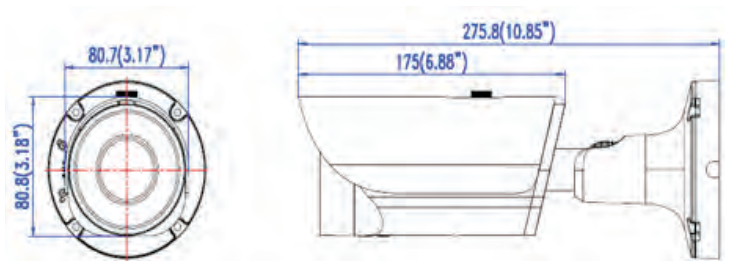

Supported Browser



IP Video Surveillance Solution

Specification

S-WIRV-2M | S-WIRM-2M | S-WIRV-4M | S-WIRM-4M | S-WIRV-5M | S-WIRM-5M

Camera	Image Sensor	1/2.9" progressive scan CMOS		
	Min. Illumination	0.1Lux/F2.0 (Color), 0Lux/F2.0(IR on)		
	Electronic Shutter Speed	Auto/Manual, 1/3~1/10000s		
	Day/Night	Auto(ICR)		
	Lens	2.8-12mm @ F2.0, Angle of view: 97.6°~28.8°		
	Max. IR LEDs Length	50M		
Compression Standard	Video Compression	H.264		
	H.264 Codec profile	Main profile		
	Video Bit Rate	32 Kbps~9 Mbps		
	Audio Compression	G.711A		
Image	Max.resolution	1920*1080	2592*1520	2560*1920
	Frame Rate Main Stream	25fps (1920*1080)	25fps (2592*1520)	25fps (2560*1920)
	Frame Rate Sub Stream	D1/CIF 25fps		
	BLC	On/Off		
	ROI	Support		
	Defog	Support		
Network	Network Storage	NAS		
	Alarm Trigger	Motion detection, Intrusion detection, Line crossing, Network Disconnect, IP address conflict, Storage exception		
	Protocols	TCP/IP,ICMP,HTTP,FTP,DHCP,DNS,DDNS,RTP, RTSP,RTCP,NTP,UPnP,SMTP,UPnP-TM,P2P		
	System compatibility	Onvif 2.4,Profile S, CGI,Mobile Surveillance		
	Smart Phone	iPhone, Android		
Interface	Communication interface	1 RJ45 10M / 100M ethernet port		
	On-board storage	Support Micro SD/SDHC/SDXC slot, upto 128GB		
	Audio I/O	1/1		
	Alarm I/O	1/1		
	Reset button	Support		
General	WDR	Supported		
	POE	Built in POE		
	Power Supply / Consumption	DC12V ±10% / Max. 7W		
	Weather Proof & Protection Level	IP66& IK10		
	Operating Conditions	-30 °C ~ 60 °C, Humidity 95% or less (non-condensing)		



| www.secureye.com

